




LED PAR56 USER MANUAL

Thanks for choosing the DMX LED Par56 spot light. This is the innovative LED application for professional lightings. Since the RGB ultra bright LED lamps, the unit can combine more than 16.7 million soft color effects. It meets to use for the entertainment stage, dancing halls, clubs etc..

Technical Specifications:

- LED: 108pcs RGB, R 36, G 36, B 36
- Power: 16W
- Voltage: AC110V-250V. 60Hz-50Hz
- Built-in scenes & Sound active
- DMX control: 4ch (R,G,B, Dimmer & Strobe)
- Master and slave control
- Size: 27.5*23*21CM
- Weight: 1.2kgs

OPERATION INSTRUCTIONS:

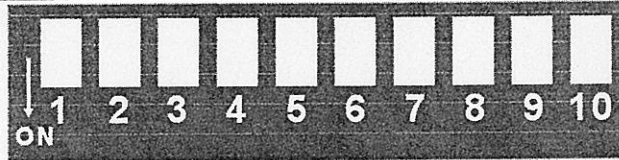

Mode	Dip10 dip9	Dip8 dip7 dip6 dip5 dip4 dip3 dip2 dip1	Function
Auto. Run (Master projector)	0 0	X X 0 0 0 0 0 0	Color changing and color fading Select running speed via dip7,dip8
		0 0 X X X X X X	Static color and flash Select static color via dip1~dip3(seperately for R.G.B) select flash speed via Dip4~dip6
Sound activated (Master projector)	0 1	X X X X X X X X	Change color via sound activated
DMX	1 X	X X X X X X X X	DMX mode CH1→R CH2→G CH3→B CH4→Dimmer and flash
Other	1 0	0 0 0 0 0 0 0 1	1. DMX address is 1 when in DMX mode 2. As Slave projector when in M/S mode
	1 0	0 0 0 0 0 0 0 0	Black out

DMX Value/Function

CHANNEL	VALUE	FUNCTION
CH1	000-255	RED
CH2	000-255	GREEN
CH3	000-255	BLUE
CH4	000-189	DIMMER
	190-250	FLASH
	251-255	NO FUNCTION